

FIG. 1 PRIOR ART

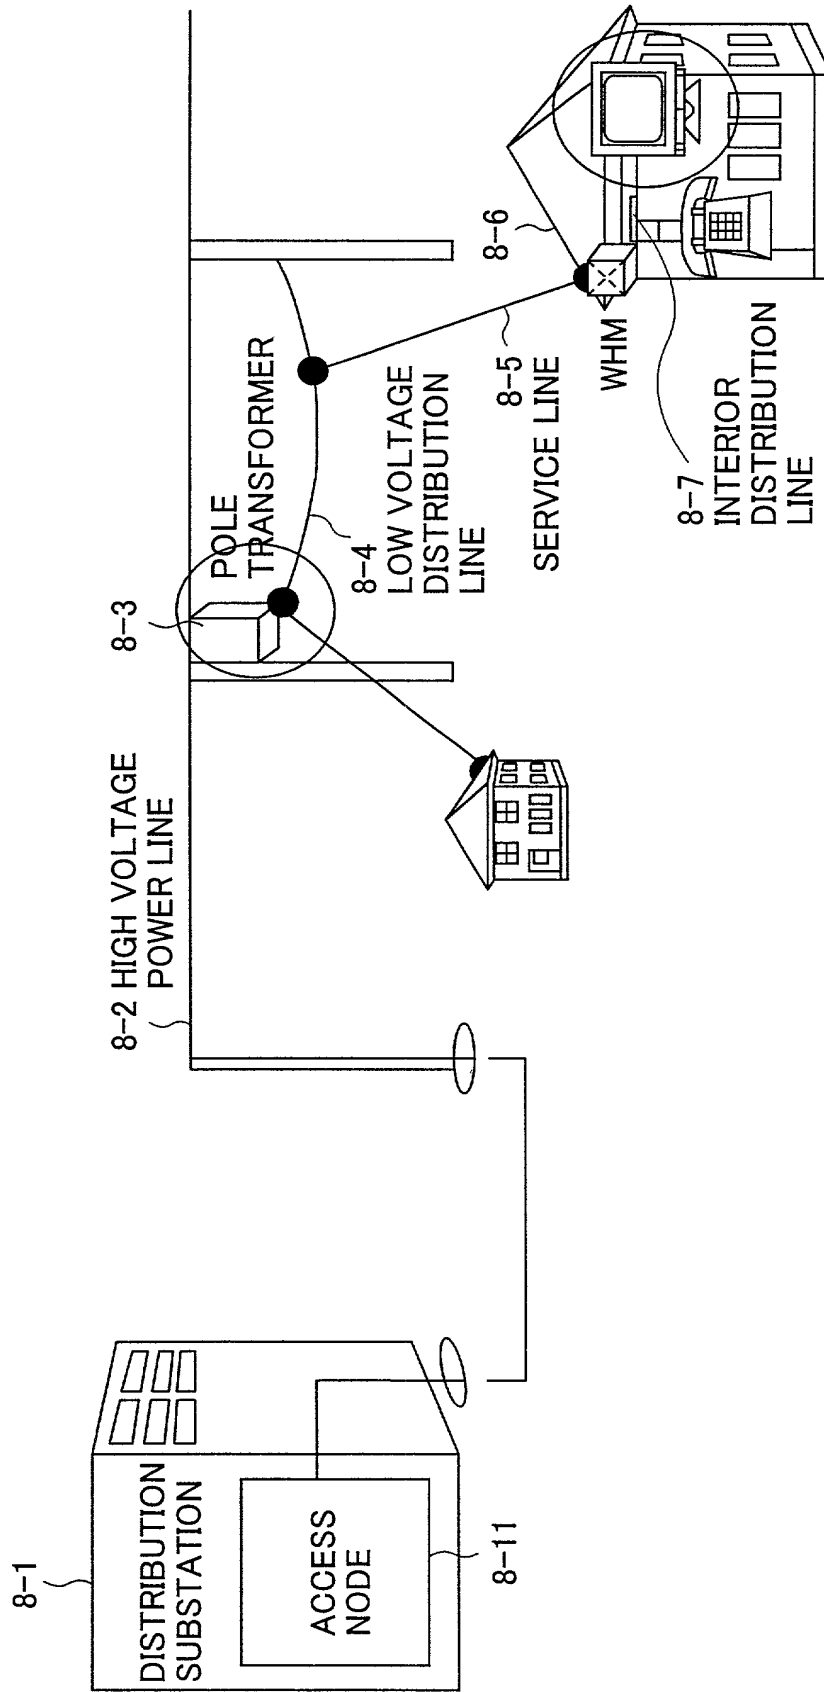


FIG. 2A

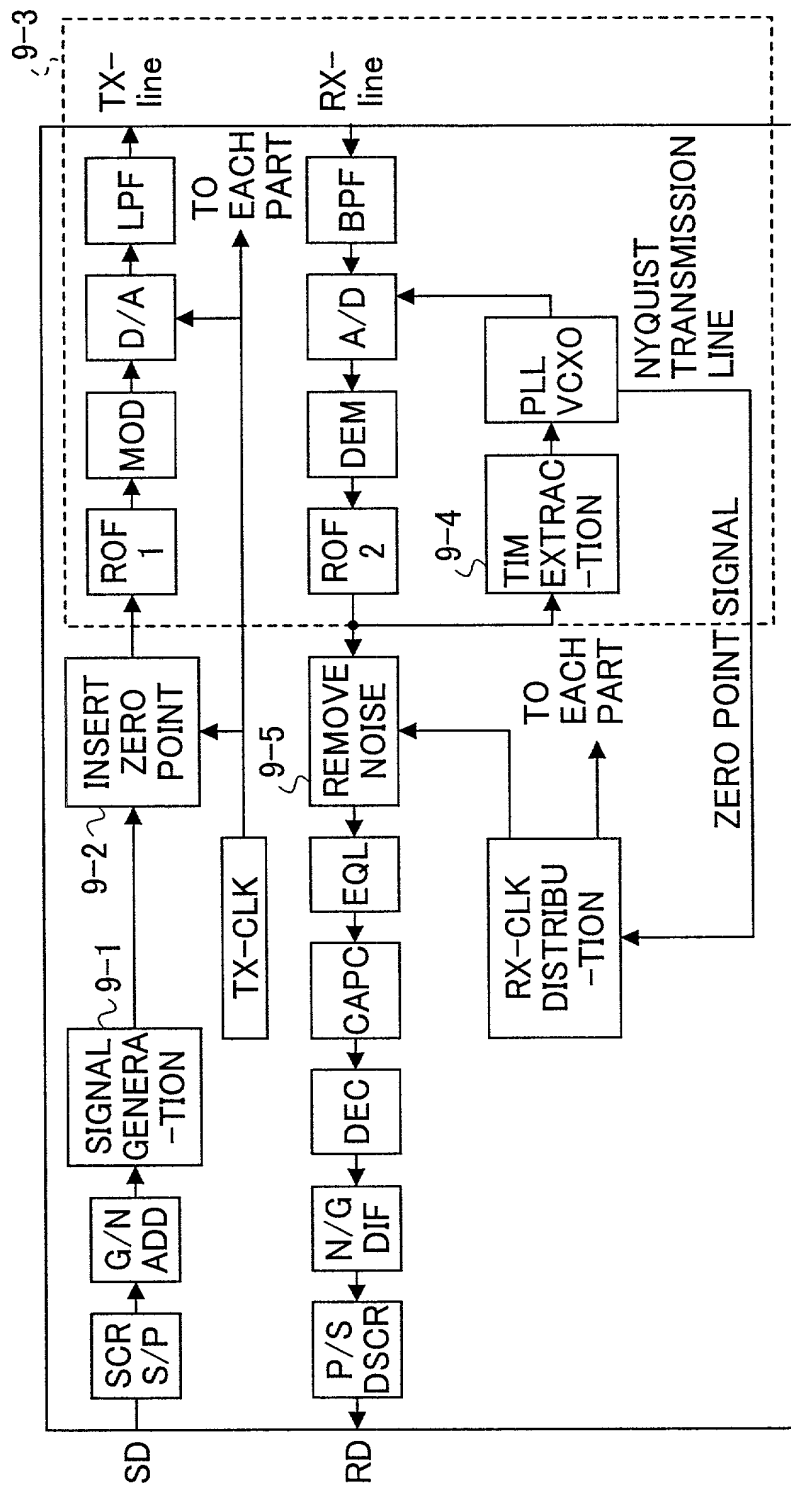


FIG. 2B

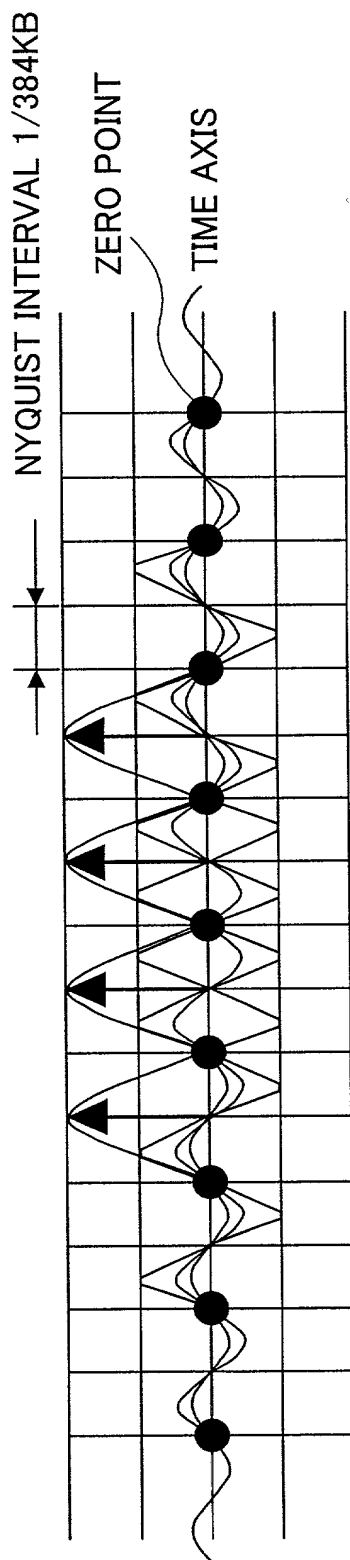


FIG.3A

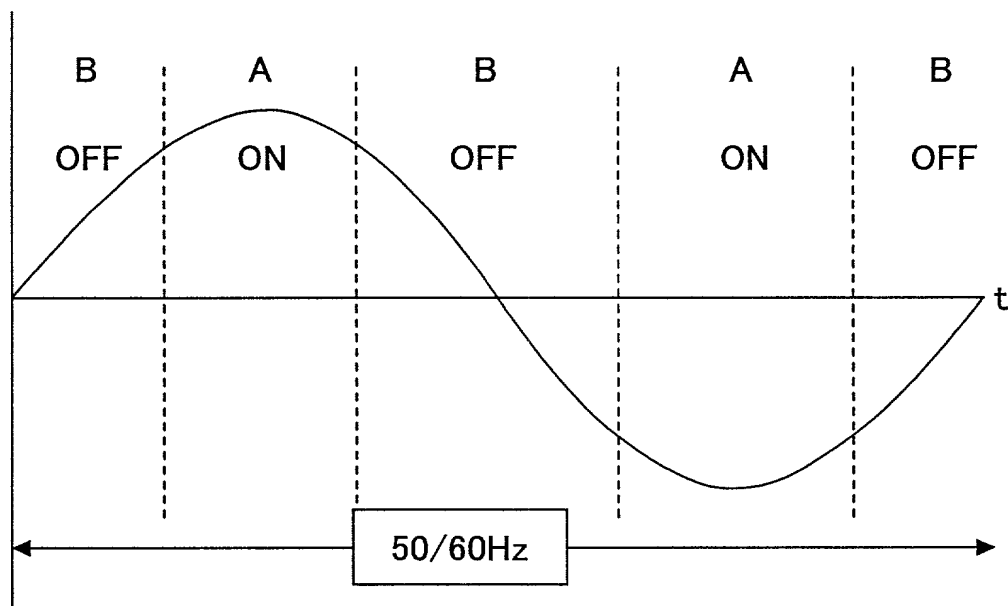


FIG.3B

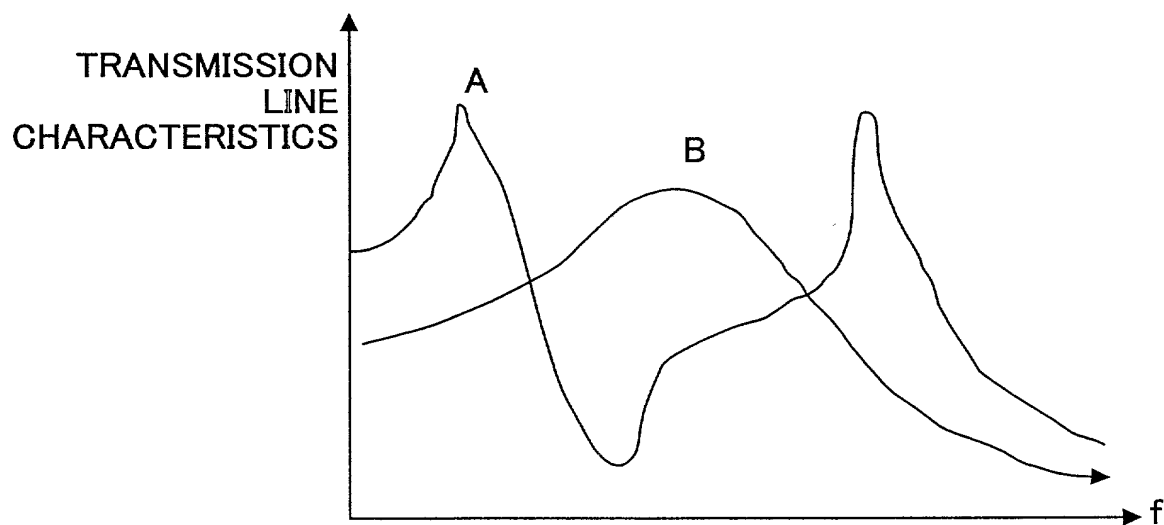


FIG. 4A


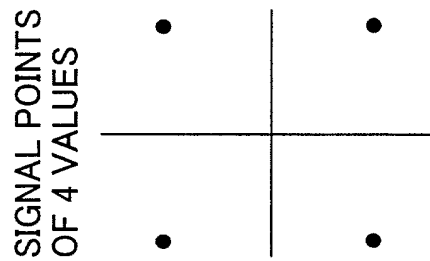


FIG. 4B

SIGNAL POINTS WHEN
RECEIVING IN A INTERVAL



SIGNAL POINTS WHEN
RECEIVING IN B INTERVAL





FIG. 4C

COMBINING A AND B



REPRESENTED
AS 8 VALUES

FIG. 5

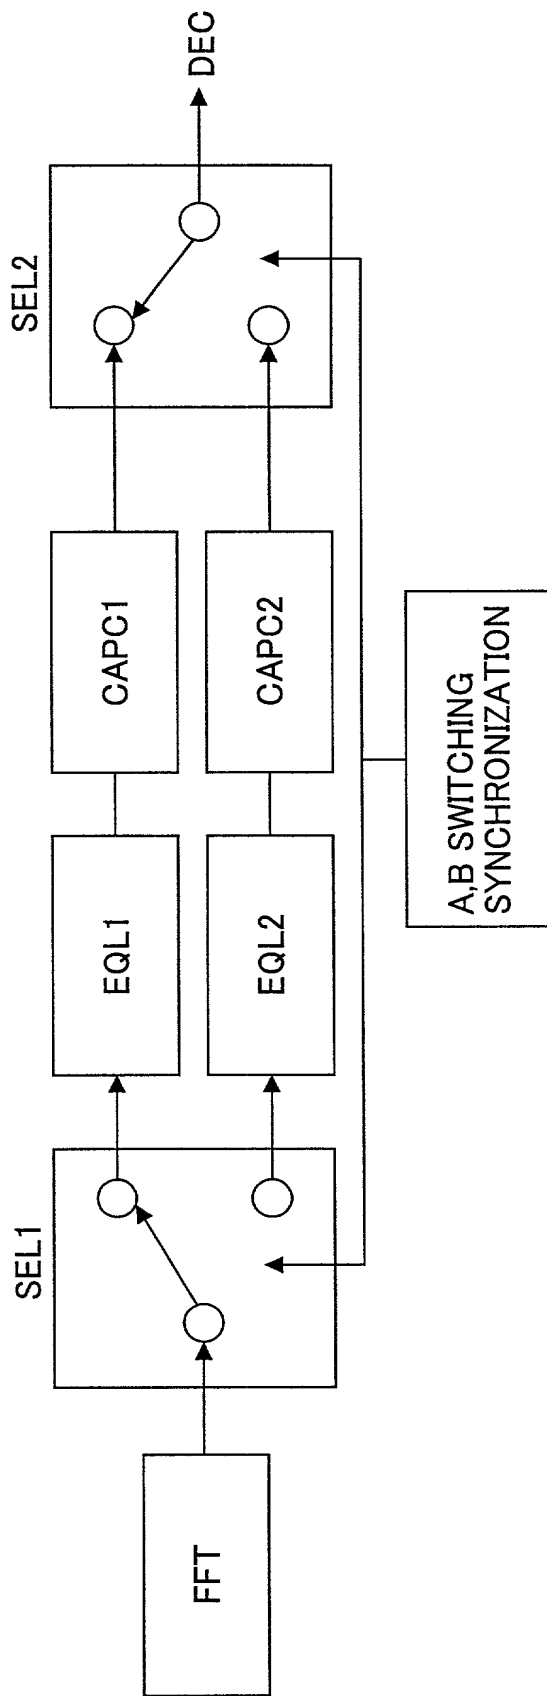


FIG.6

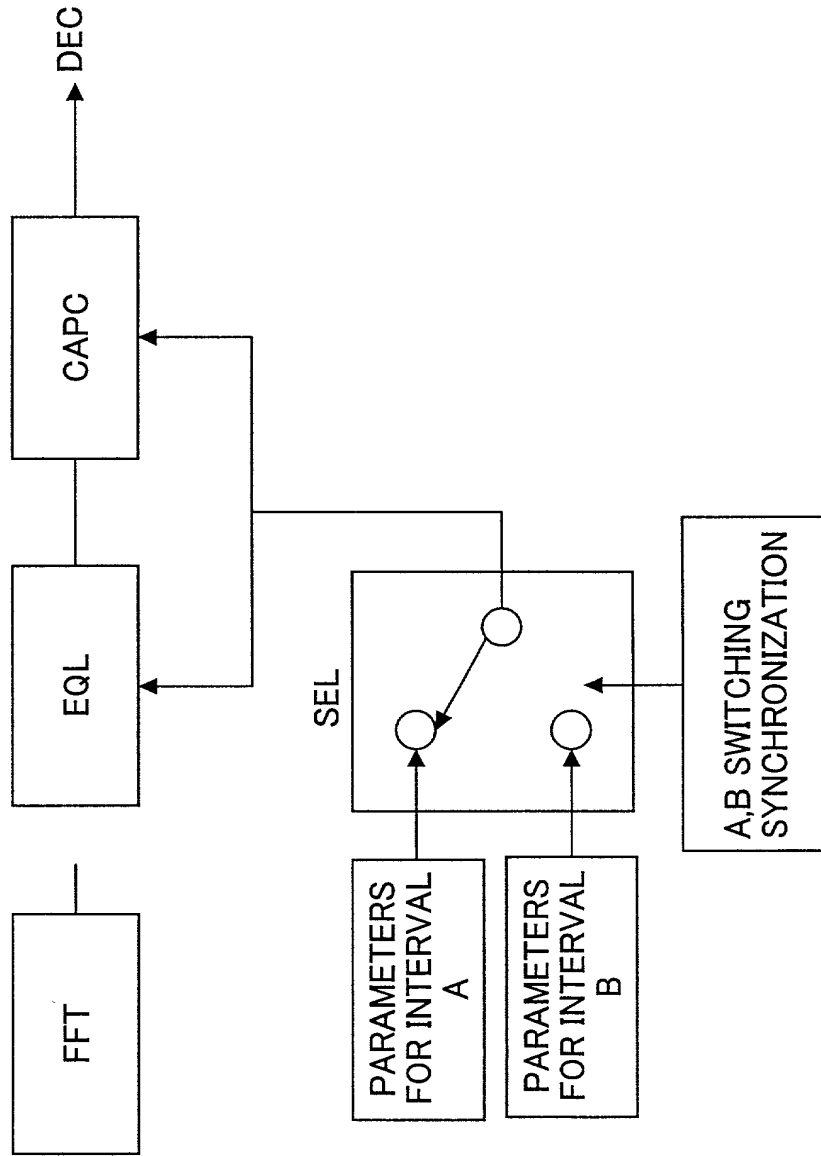


FIG. 7A

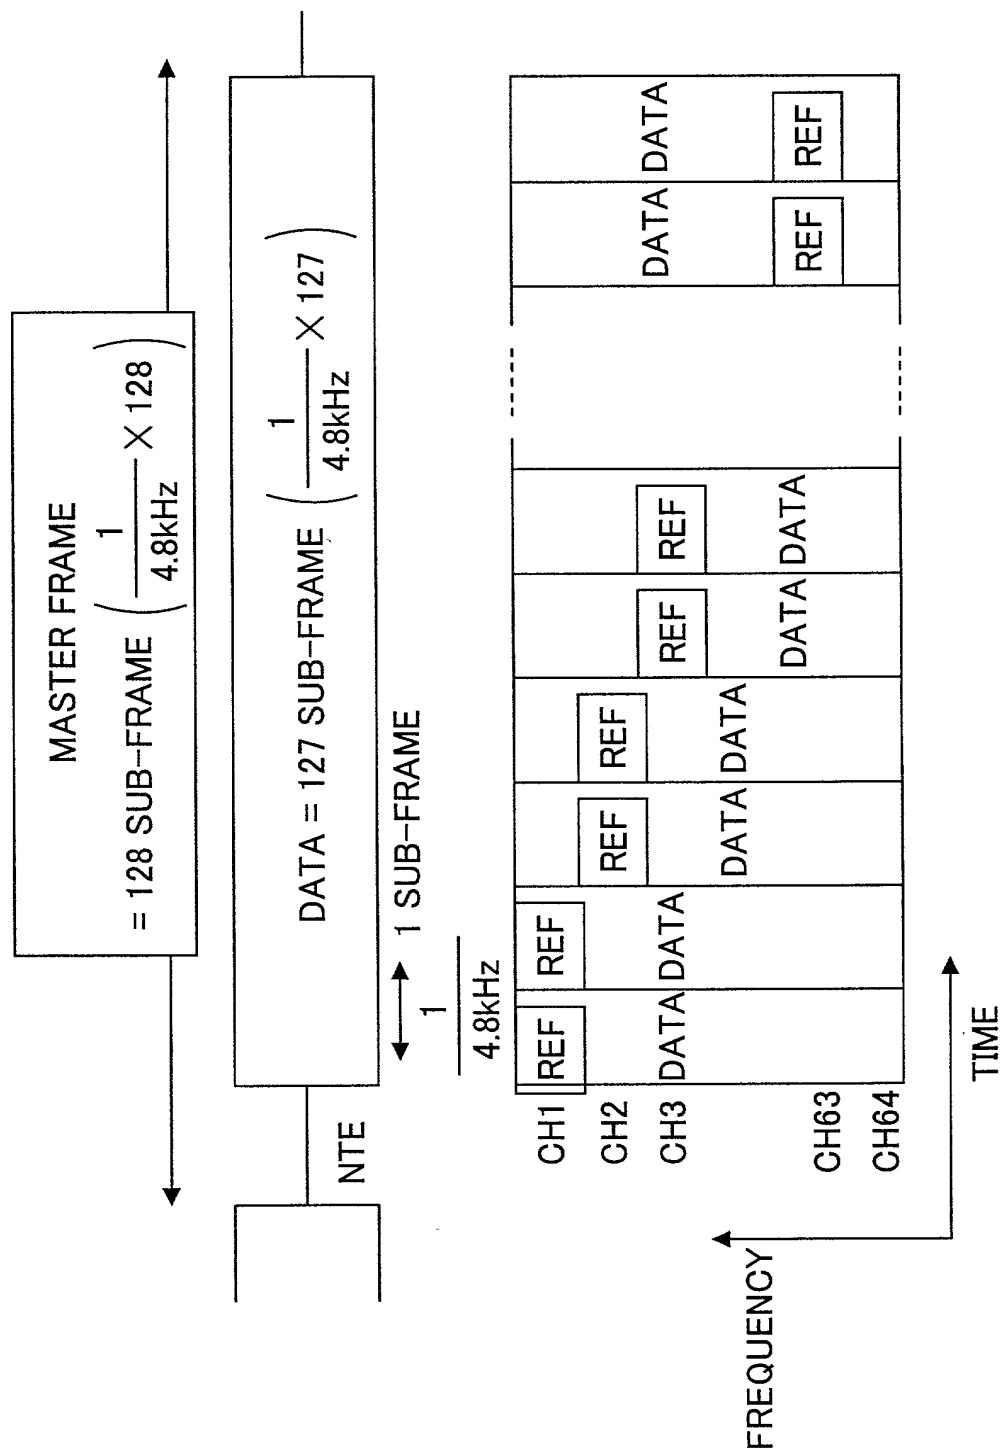


FIG.7B

REF SIGNAL POINT

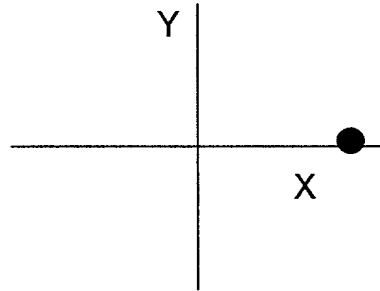


FIG. 8

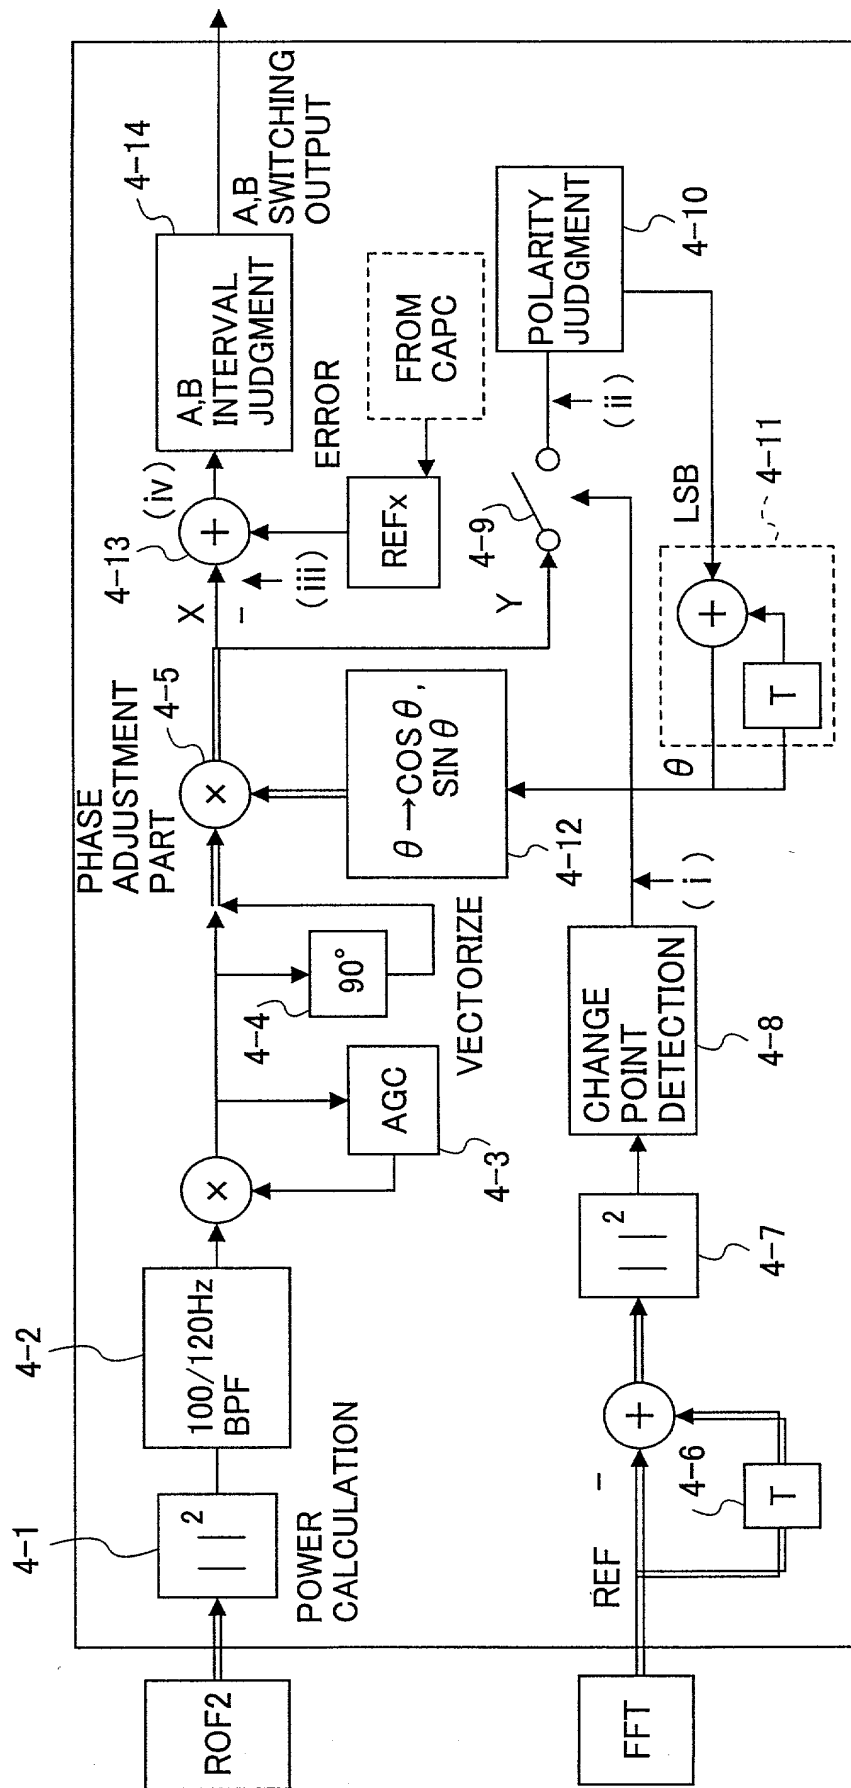


FIG.9A

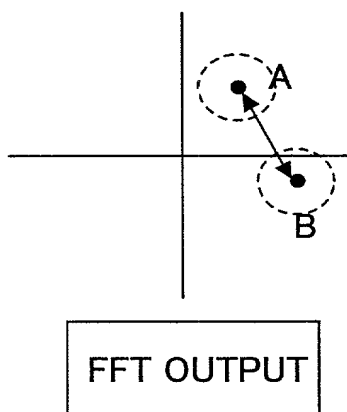


FIG. 9B

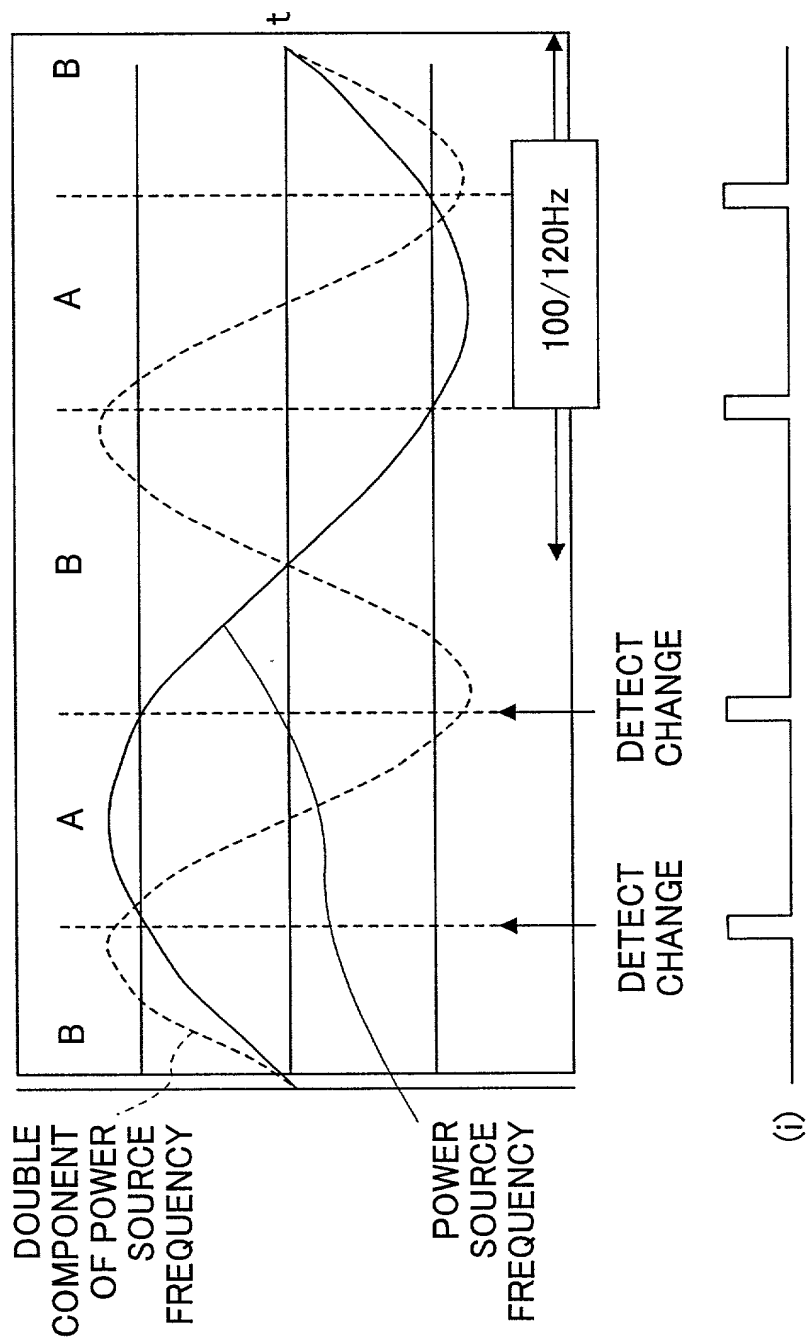


FIG.10A

BEFORE PHASE
ADJUSTMENT

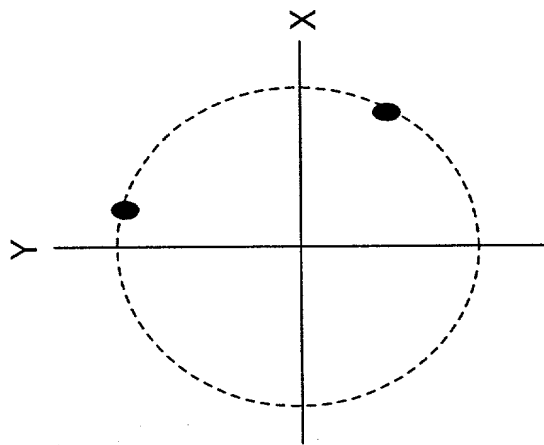


FIG.10B

AFTER PHASE
ADJUSTMENT

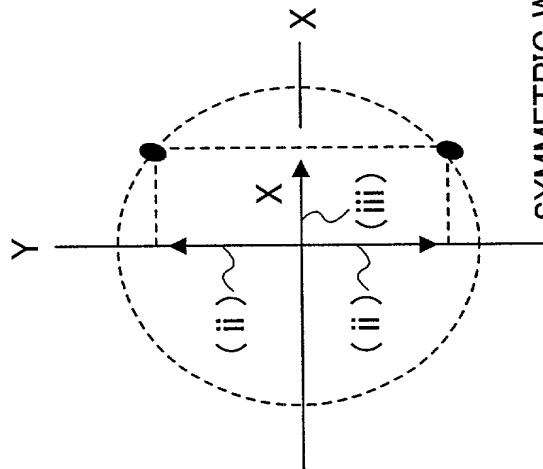


FIG.10C

A,B INTERVAL
JUDGMENT

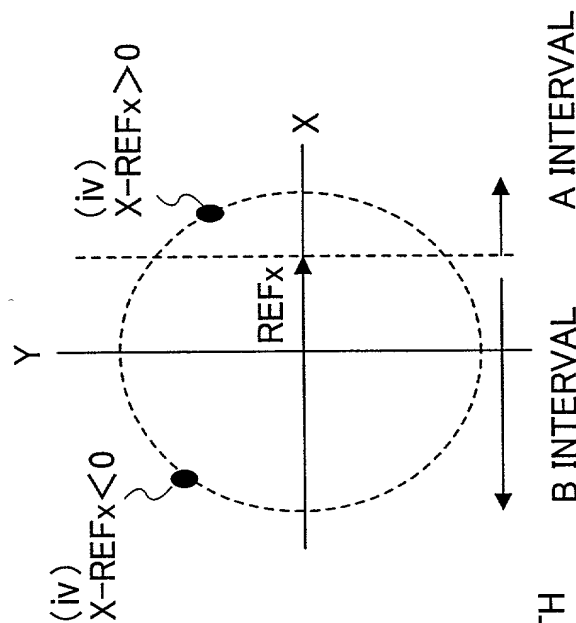


FIG. 11

